


Collegare la chiavetta WiFi in modalità AP

il primo passo:


Accendere l'interruttore CC e il sezionatore CA e attendere che l'indicatore LED del modulo di monitoraggio lampeggi, indicando che il modulo di monitoraggio è stato collegato correttamente.

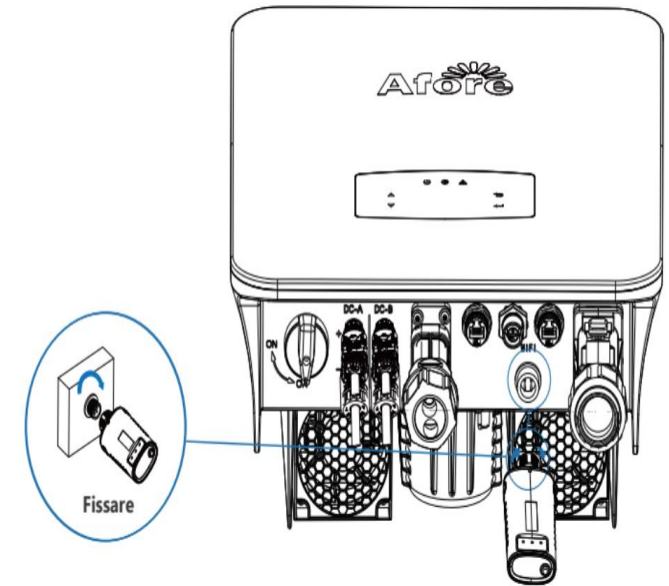

2 Passo:


Attivare la ricerca delle reti wifi sul telefono o PC in modo da visualizzare tutte le reti visibili dal dispositivo.

Collegarsi alla rete wifi generata dalla scheda wifi dell'inverter (del tipo **AP_*******, dove ***** indica il seriale della scheda wifi riportato sull'etichetta del dispositivo), operante come un Access Point.

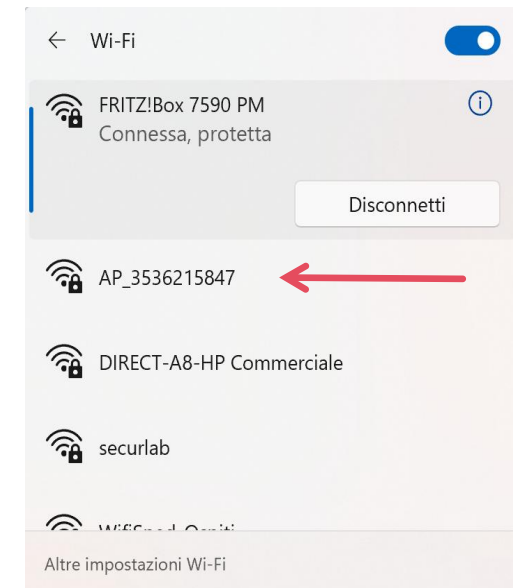


3 Passo:

Inserire la **password** sulla chiavetta WiFi per connettersi alla rete.

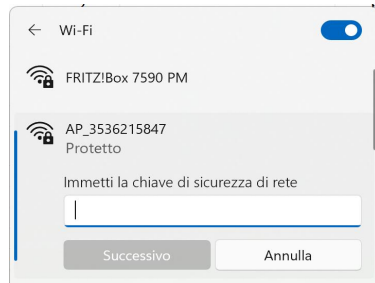

Nota: l'Access Point non è in grado di fornire l'accesso a Internet; confermare di mantenere la connessione wifi anche se internet non è disponibile

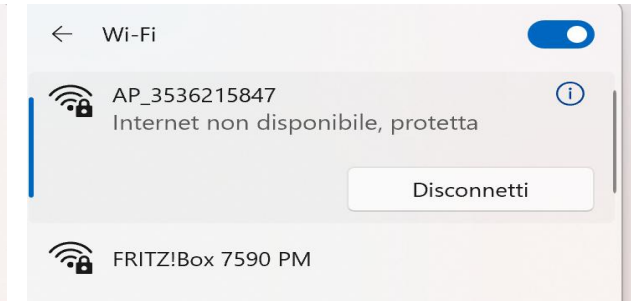


4 Passo:

Accedere ad un browser (Google Chrome, Safari, Firefox) e digitare nella barra degli indirizzi posta in alto l'indirizzo

10.10.100.254

Nella maschera che appare digitare **admin** sia come Nome utente che come Password.

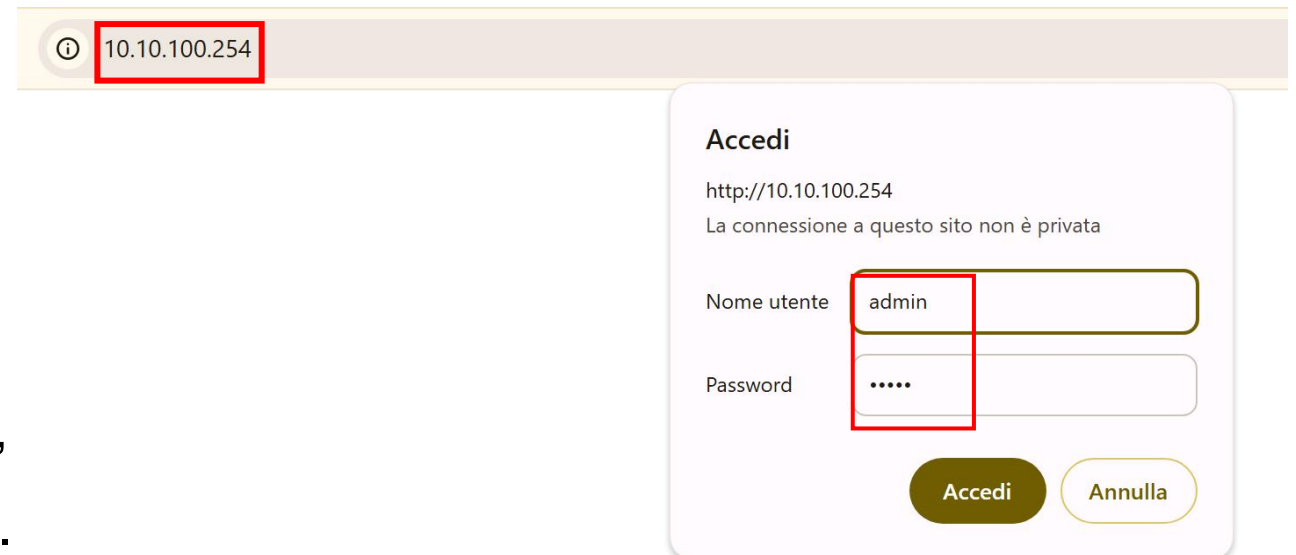

5 passo:

Clicca su Quick Set e Search, seleziona la rete di casa, poi clicca su OK, inserisci la password di casa, clicca su Save e il processo sar  completato.

Status
Wizard
Quick Set
Advanced
Upgrade
Restart
Reset

Network name (SSID)
(Note: case sensitive)

FRITZ!Box 7590 PM

Search

Encryption method

WPA2PSK

Encryption algorithm

AES

Password (8-64 bytes)
(Note: case sensitive)

Obtain an IP address automatically

Enable

IP address

192.168.178.241

Subnet mask

255.255.255.0

Gateway address

192.168.178.1

DNS server address

156.239.0.66

Save

Help

In this page, you can click the "Search" button to automatically search for nearby wireless access point, and connect your device to it by setting the network parameters.

★Note: If you haven't set this kind of device before, please follow the setup wizard.

★Note: After clicking Save, the system will restart immediately.

You need to re-login the configuration interface after restart.

1

Status
Wizard
Quick Set
Advanced
Upgrade
Restart
Reset

Please select your current wireless network

Site Survey

SSID	BSSID	RSSI	Channel
☒ FRITZ!Box 7590 PM	B0:F2:8:F3:F2:68	92	1
☐ securilab	48:8F:5A:4A:1:5E	80	8
☐ DIRECT-A8-HP Commerciale	FE:3F:DB:B9:47:A8	59	6
☐ DIRECT-49-EPSON-ET-5170 Series	66:C6:D2:E3:62:F4	42	1
☐ WifiSped_Ospiti	0:3A:9A:A5:B0:41	40	1
☐ WI-FI Ospiti	C8:4F:86:AF:38:B0	33	11
☐ DIRECT-dONB-GALamsYU	36:41:5D:B9:55:F0	30	6
☐ WI-FI Dipendenti	C8:4F:86:AF:38:AF	30	11
☐ Button SSID	58:6D:8F:82:43:8C	25	6
☐ RFAida	0:3A:9A:C8:D0:80	18	6
☐ DIRECT-64-HP M404dw	82:EB:2C:7:8B:64	16	6

★Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

OK

Refresh

2

Status
Wizard
Quick Set
Advanced
Upgrade
Restart
Reset

Network name (SSID)
(Note: case sensitive)

FRITZ!Box 7590 PM

Search

Encryption method

WPA2PSK

Encryption algorithm

AES

Password (8-64 bytes)
(Note: case sensitive)

.....

Obtain an IP address automatically

Enable

IP address

192.168.178.241

Subnet mask

255.255.255.0

Gateway address

192.168.178.1

DNS server address

156.239.0.66

Save

★Note: After clicking Save, the system will restart immediately.

3

Status
Wizard
Quick Set
Advanced
Upgrade
Restart
Reset

Setting complete! Please close this page manually!

Please login our management portal to monitor and manage your PV system.(Please register an account if you do not have one.)

To re-login the configuration interface, please make sure that your computer or smart phone and our device are in the same network segment, and enter the new IP address of the device to access the interface.

4